

# Color Laser Coated gloss

Artikelcode: CLCG\*

## produkt description

Color Laser Coated gloss is a coated paper that impresses with its incredibly even glossy surface and ensures the highest intensity in the reproduction of images and colors.

Color Laser Coated is ideal for printed products, such as photo books, brochures, annual reports and all laser printouts that require vivid colors.

## features


- > smooth surface on both sides
- > exceptional reproduction of intensity, color and detail
- > CIE Whiteness 126
- > extensive assortment
- > consistent, reliable quality
- > especially suitable for laser printing

## assortment

format / grammage (g/m <sup>2</sup> )	135	170	200	250
A4	x	x	x	x
A3	x	x	x	x
SRA 3	x	x	x	x

## technical specifications

grammage (g/m <sup>2</sup> )	ISO 536	135	170	200	250
thickness (µm)	ISO 534	95	124	148	185
volume (cm <sup>3</sup> /g)	ISO 534	0,70	0,73	0,74	0,74
opacity (%)	ISO 2471	95,0	97,0	98,0	98,5
CIE whiteness (%)	ISO 11475	126	126	126	126
gloss Tappi 75° (%)	ISO 8254-1	66	66	66	68

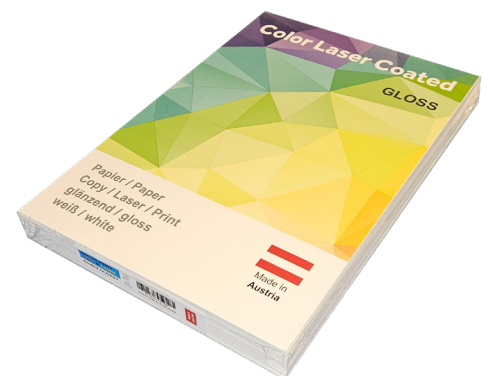

# Color Laser Coated silk

Artikelcode: CLCS\*

## product description

Color Laser Coated silk is a coated paper that convinces with its beautiful, silky surface and ensures the highest intensity in the reproduction of images and colors.

Color Laser Coated is ideal for printed products, such as photo books, brochures, annual reports and all laser printouts that require vivid colors.

## features

- › silky smooth surface on both sides
- › exceptional reproduction of intensity, color and detail
- › CIE Whiteness 127
- › extensive assortment
- › consistent, reliable quality
- › especially suitable for laser printing

## assortment

format (cm)/ grammage (g/m <sup>2</sup> )	135	170	200	250
A4	x	x	x	x
A3	x	x	x	x
SRA 3	x	x	x	x

## technical specifications

grammage (g/m <sup>2</sup> )	ISO 536	135	170	200	250
thickness (µm)	ISO 534	111	141	168	225
volume (cm <sup>3</sup> /g)	ISO 534	0,82	0,83	0,84	0,90
opacity (%)	ISO 2471	95,5	97,5	98	98,5
CIE whiteness (%)	ISO 11475	127	127	127	127
gloss Tappi 75° (%)	ISO 8254-1	38	38	38	38

